

THRUVUE™ INFINITY MOTORIZED WINDOW

BUILD 3 EL ALUMINUM EXT/ ALUMINUM INT


Unit Width:	144.000"	Open angle Straight out 90°
Unit Height:	72.000"	
R.O. Width:	144.500"	
R.O. Height:	72.500"	

Approved By:


Date:

Note:

RO Width: Rough Opening width is from framing to framing
RO Height: Rough Opening height is from countertop to framing

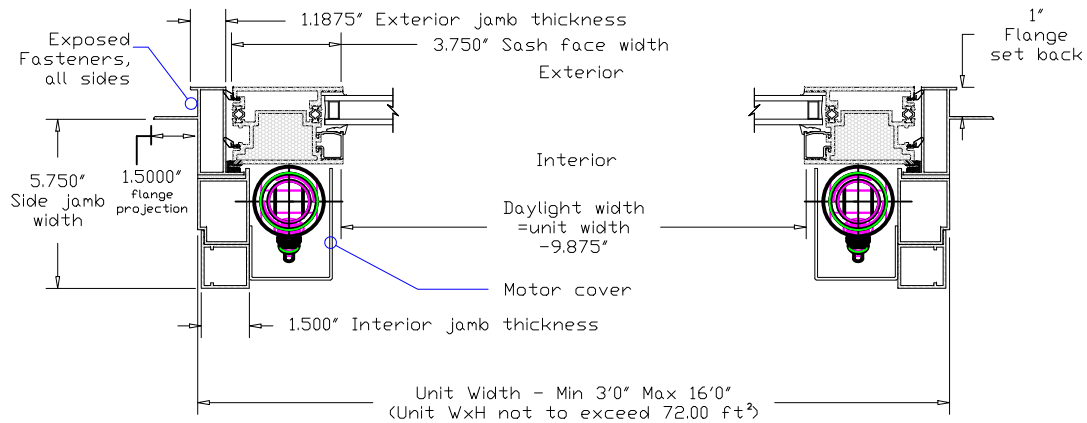


Plan View

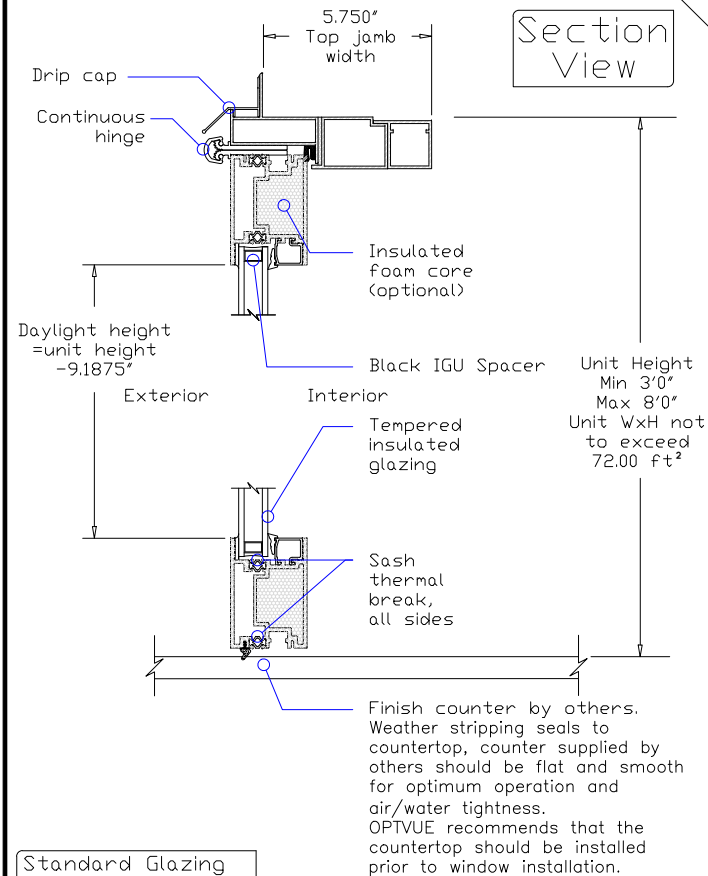

Section View

Exterior Elevation

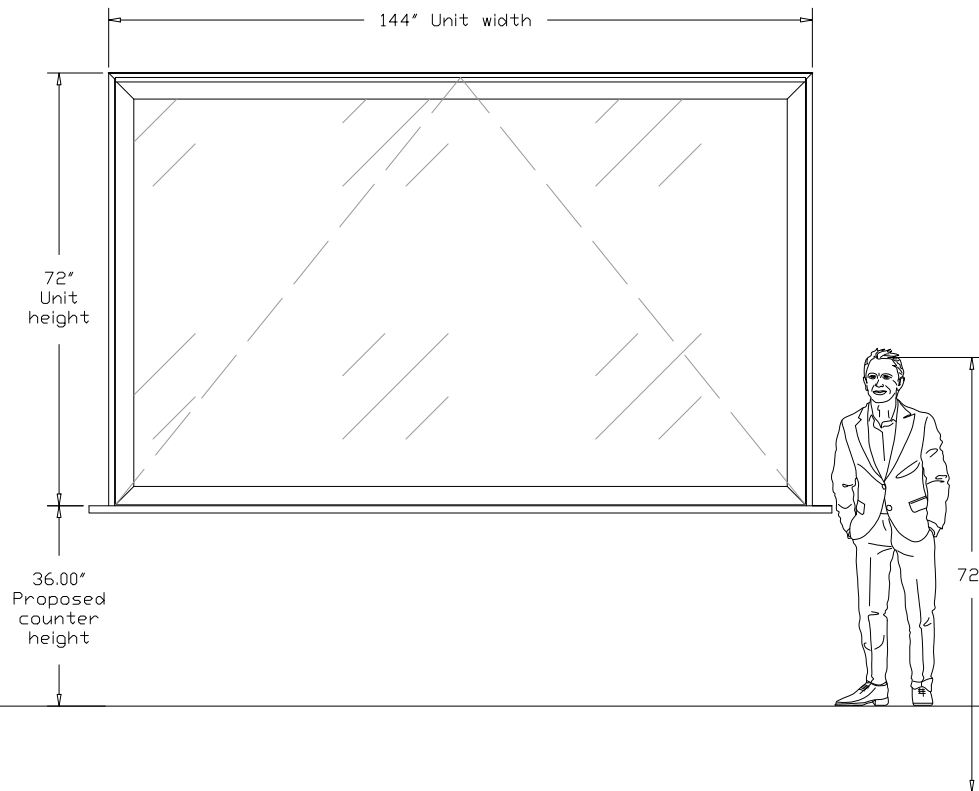

General Notes	
Production Info	
Build Dimensions	
Unit Width	144.0000
Unit Height	72.0000
Sash Width	141.6250
Sash Height	70.3125
Glass Width	135.3750
Glass Height	64.0000
Sash Center	70.8125

Finish Schedule	
Jamb Exterior	Color
Sash Exterior	Color
Jamb Interior	Color
Sash Interior	Color
Sash core/edge	Blk Anodize
Hinge Exterior	Color
Handle Exterior	N/A
Handle Interior	N/A
Motor Interior	Black
Motor Mount	Stainless
-	-
Motor Cover	Color
Drip Cap	Color
IGU Spacer	Black
Screen Track	N/A
Screen Mesh	N/A
Weather Strip	Black

Manufacturer Name and Address

OPTVUE
3204 PRODUCTION AVE
OCEANSIDE, CA 92058
+1(760) 760-0110

Standard Glazing Specification
Glass Type: Cardinal LoE-366
• 1" IGU - 6mm LoE366/12.7mm Air/6mm Clear
• Visible light transmission=60%
• Exterior reflectance=11%
• Solar heat gain coefficient=0.28
• Winter U-Value=.029, >34ft²

Customer	Sheet
OPTVUE CUSTOMER	1
Date	10/27/25
Scale	-